

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
20 January 2005 (20.01.2005)

PCT

(10) International Publication Number  
**WO 2005/005299 A1**

(51) International Patent Classification<sup>7</sup>: **B66B 1/06**

(21) International Application Number:  
PCT/US2003/018597

(22) International Filing Date: 10 June 2003 (10.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): OTIS ELEVATOR COMPANY [US/US]; Intellectual Property Department, 10 Farm Springs, Farmington, CT 06032 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ZEPKE, Bruce [US/US]; 186 Lancaster Road, Glastonbury, CT 06033 (US). VERONESI, William [US/US]; 342 Fairfield Avenue, Hartford, CT 06114 (US). ZACCHIO, Joseph [US/US]; 30 Livingston Street, Wethersfield, CT 06099 (US). STUCKY, Paul [US/US]; 43A Mt. Vernon Drive, Vernon, CT 06066 (US). BELLAMY, Dennis [US/US]; 15 School Street, Stafford Springs, CT 06076 (US). NETTER, Christian [DE/US]; 169 Vernon Avenue, Apt. 131, Vernon, CT 06066 (US). VECCHIOTTI, Alberto [IT/US]; 142 Greenview Terrace, Middletown, CT 06457 (US). BACELLAR, Adriana [BR/US]; 44 Grandview Drive, Glastonbury, CT 06033 (US). BACELLAR, Luiz

[BR/US]; 44 Grandview Drive, Glastonbury, CT 06033 (US). HAAS, Deborah [US/US]; 205 Ashbrook Drive, Coventry, CT 06238 (US).

(74) Agent: OSBORN, Thomas; Otis Elevator Company, 10 Farm Springs, Farmington, CT 06032 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

[Continued on next page]

(54) Title: INDUCTIVELY COUPLED POWER, USEFUL FOR WIRELESS ELEVATOR HALL FIXTURES

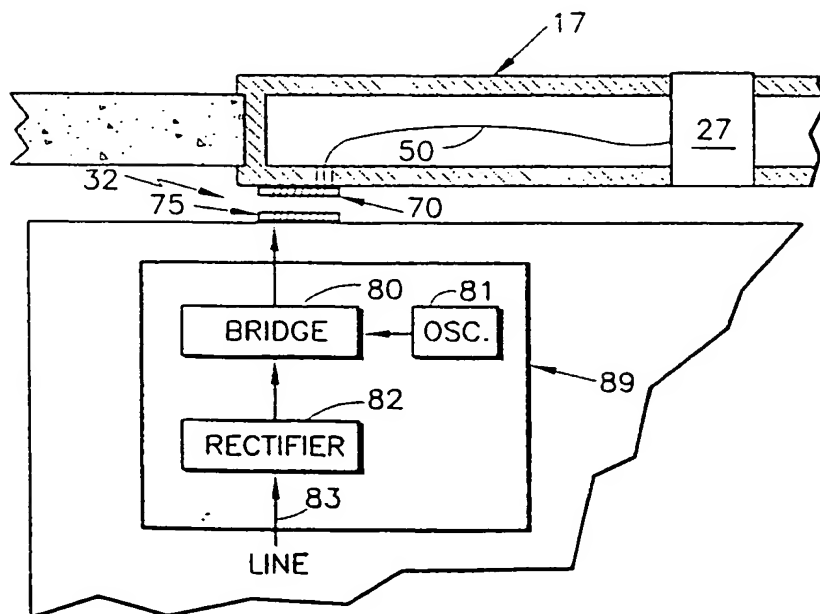

(57) Abstract: Fixtures (27) at a doorway of a landing are formed integrally with a frame (17). Power is provided by an inductive coupler (32) having a core (70) and primary (75). The core is thin territe and extend significantly beyond the coils in the plane the coils are wound, to provide an extremely low resistance path for the efficient transfer of AC power.



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

2/PRTS.

JC05 Rec'd PCT/PTO 7 OCT 2005

INDUCTIVELY COUPLED POWER. USEFUL FOR  
WIRELESS ELEVATOR HALL FIXTURES

Technical Field

5 This invention relates to inductive power coupling, useful, for instance, for powering elevator hall fixtures, including call button lights, directional lanterns, and floors indicators, for the purpose of elimination of building wiring. Wireless power is supplied to the hall fixtures by inductive coupling of power from the elevator while it is at the landing.

10 Background Art

Elevator systems have hallway fixtures at each floor, including directional lanterns, hall call buttons, and in some cases, elevator position indicators. Traditionally, each hallway fixture on every floor was powered by means of wires run through the hoistway, with additional wires to provide signal communication between the floor and the controller, which has typically been located at the top of the hoistway in a machine room. To reduce the amount of wiring, modern systems use serial communication buses, which typically may require two wires for communication and two for power, one bus each for the lanterns and call buttons. The wiring requires significant installation time in new buildings, and makes modernization of existing elevators extremely difficult. Further, work in the hoistway is dangerous and should be avoided if possible.

The communication aspect of hall fixtures has been rendered wireless by means of radio frequency (or other) wireless communications. However, power is still required to be provided by wires, which must be specifically installed in the building during initial construction of an elevator system, or as a consequence of modernization.

25 Suggestions have been made to use very large coils disposed on the elevator car and the hoistway wall with large air gaps, such as the 30mm (1.2 inch) running clearance between moving and stationary portions of an elevator system, which is required by typical regulatory codes, so that power can be inductively coupled from the car to the hoistway wall when the elevator car is at a landing, thereby to power the fixtures. It has also been suggested that magnetic coupling of power, such as between an elevator car and a hoistway wall, may be effectively achieved with coils having large C-shaped cores. However, it has been determined that large coils and C-shaped cores, with large air gaps, cannot effectively transfer the necessary power in a compact and efficient manner.

Disclosure of Invention

Objects of the invention include: an improved magnetic coupling for contactless power transfer; provision of improved contactless electric power transfer; provision of  
5 improved power transfer for wireless elevator hallway fixtures; and provision of improved power coupling for elevator hallway fixtures which receive power without building wiring.

This invention is predicated on our discovery that efficient, contactless inductive coupling for power transfer is effected by means of ferrite cores which are very much larger than the windings so as to provide a large area of magnetic coupling between a primary  
10 winding and a secondary winding.

According to the present invention, a magnetic power coupling comprises a large, low reluctance path through a required air-gap, such as, for instance, elevator/hoistway clearance, with a minimum of ferrite material, thereby saving costs and space and reducing the volt/amp requirements of driving electronics. A primary and a secondary both include a ferrite core with  
15 a winding wound onto the ferrite core, said ferrite cores being surrounded by said windings along the length of said windings and over a portion of the width of said windings, said ferrite cores having a length which is at least as great as the length of said winding, said ferrite cores having a length and width which is between two and ten times as great as the air-gap between the primary and secondary. According to the invention further, an inductive power coupling  
20 apparatus includes coupling high frequency electric power (e.g., tens of kilohertz), which may, for instance, be provided by an H-bridge in turn driven by DC power obtained by rectifying ordinary building line voltage, all of which form a high frequency AC source. On the secondary side, the received high frequency signal is simply rectified and used to charge a battery, which supplies the power to the fixtures as needed.

25 According further to the invention, power for elevator hall fixtures is provided by magnetic coupling with a source on an elevator car.

The invention provides a power coupling capability useful in a wide variety of applications; for instance, it obviates the need for any power wiring whatsoever at an installation of elevator hallway fixtures.

30 Other objects, features and advantages of the present invention will become more apparent in the light of the following detailed description of exemplary embodiments thereof, as illustrated in the accompanying drawing.

### Brief Description of the Drawings

Fig. 1 is a front elevation view of an elevator hall door frame having fixtures and employing a magnetic coupling as a source of power, in accordance with the invention.

5 Fig. 2 is a rear elevation view of the hallway door frame of Fig. 1.

Fig. 3 is a partial, partially sectioned, top view of the door frame of Fig. 1 and an elevator car.

Fig. 4 is a perspective view of a magnetic coupling of the invention.

### 10 Mode(s) for Carrying Out the Invention

Powering elevator hallway fixtures is one example of use of the invention.

Referring to Fig. 1, a doorway 13 at a landing 14 of an elevator includes a hoistway door opening 16 defined by a door frame 17. The opening 16 is closed off by hoistway doors 19, 20 except when a car is servicing the landing 14 (which means stopped and opening the  
15 doors). The door frame includes a call module 22 which has one or two hall call buttons, in the conventional fashion such as an up call button 23 and a down call button 24. The call buttons may be illuminated by LEDs, or in some other suitable way, to indicate that a call has been registered. The door frame 17 also includes a lantern fixture 27 having one or two  
20 conventional directional arrows, such as an up directional arrow 28 and a down directional arrow 29 that are selectively illuminated to indicate the direction of elevator travel. The arrows may be illuminated by high-intensity LEDs, or in some other suitable way, to indicate car direction.

The fixtures 22, 27 are powered by the inductive coupler 32 of the invention, which is seen more clearly in Fig. 2.

25 In Fig. 2, the inductive coupler secondary 70 is shown connected by a cable 50 to the lantern fixture 27, which is connected to the call fixture 22 by a cable 51. The cables 50, 51 are within the frame 17. The lantern fixture 27 may have an electronic module 54 and an energy storage device, which may be a battery 55 or a super capacitor, all as is known in the art. The electronic modules will include circuits for receiving the high frequency current from  
30 the inductive coupler secondary 32, rectifying it, and using the power to charge the battery 55, all as is known and within the skill of the art. The electronic module 54 may also include communicating with the elevator controller, such as by radio frequency electromagnetic

radiation, monitoring the remaining power of the battery 55, as well as controlling the application of power to the directional lights 28, 29 and to the up and down hall call buttons 23, 24. The module 54 may take the form of piconet modules, disclosed in commonly owned, copending patent application PCT/US02/32848, which may comprise modules conforming to  
5 BLUETOOTH specifications, utilized in the manner described in that application. Other electronic modules, which can operate with extreme low power consumption and provide adequate control and communication may be utilized, as desired.

The efficient inductive coupler secondary 70 has few turns of wire 71 but a very large ferrite core 72, as shown in Figs. 3 and 4. On the elevator car, an inductive coupler primary 75,  
10 similar to the coupler secondary 70, receives high frequency power (e.g., about 20 kHz) from an H-bridge 80. The H-bridge 80 operates on DC power provided by a rectifier 82 in response to conventional AC line voltage 83, as is known in the art; H-Bridge 80 frequency is set by oscillator 81.

Referring to Fig. 4, the secondary 75 of the coupler 32 has a primary winding 86  
15 wrapped around a core 87, both of which can be identical to the winding 71 and core 72 of the secondary 70. However, to decrease the AC and DC resistance in the primary winding 86, it may comprise twice as many wires or more of the same size as the secondary coil 71, driven in parallel.

To avoid losses to adjacent structures having magnetic reluctance, the primary and  
20 secondary have shields 84, 85, at least as large as the cores 72, 87, of aluminum or other non-magnetic material. There may be air-gaps between the shields and respective cores.

The cores 70, 75 are ferrite so as to provide minimum reluctance to the magnetic field, thereby increasing the efficiency with which power can be transferred from the primary to the secondary.

25 The width and length of the core, dimensions L and W, should be from 2 to 10 times the required air gap S.

The thickness, T, of the cores should be sufficiently large to keep the core from saturating or overheating. Increasing the cross-sectional area given by the core thickness, T, times the core length, L, reduces both saturation and overheating potential. However, L should  
30 be increased in preference to T so as to maximize the effective cross section of the magnetic circuit air gap. Thus, the thickness, T, of the cores is kept relatively small, less than 25% the width and more favorably nearer to 5%. Extremely thin cores, less 5% of the width, could be

used but would likely present manufacturing difficulties. The exact thickness is driven by the material properties of the particular ferrite used. Examples are:

width (W) between 60 and 300 mm;

length (L) between 60 and 300 mm;

5      thickness (T) between 3 and 30 mm.

The length, L, of each core 70, 75 is selected to accommodate the length of the primary and secondary coils 71, 86; however, the cores could have extensions on either side of the coil, in some cases, in order to increase coupling, if desired.

Claims:

1. An inductive power coupler, comprising:  
a primary;  
a secondary separated from said primary by an air-gap;  
said primary and secondary each having a thin ferrite core with a coil wrapped around the core;  
each of said cores having a width extending outwardly from the corresponding coil, said width and a length of said cores being between two and ten times as large as said air-gap, and a thickness of 5% - 25% of said width.
2. A magnetic power coupler according to claim 1 wherein said primary and secondary are separated by a gap of on the order of 25 - 35 millimeters (1-1.4 inch).
3. A magnetic power coupler according to claim 1 wherein:  
said thickness is between 3 millimeters (0.12 inch) and 30 millimeters (1.2 inch);  
said length is on the order of 60 millimeters (2.4 inch) to 300 millimeters (12 inches); and  
said width is on the order of between 60 millimeters (2.4 inch) and 300 millimeters (12 inches).



1/2

FIG.1


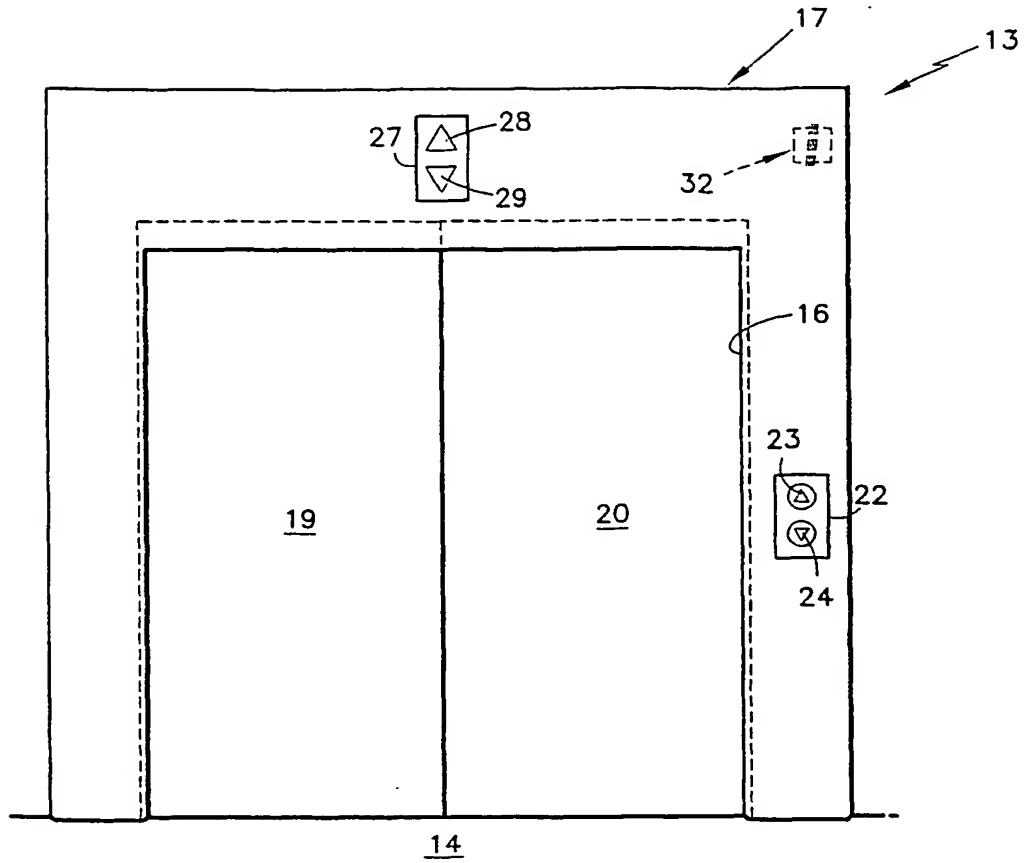


FIG.2

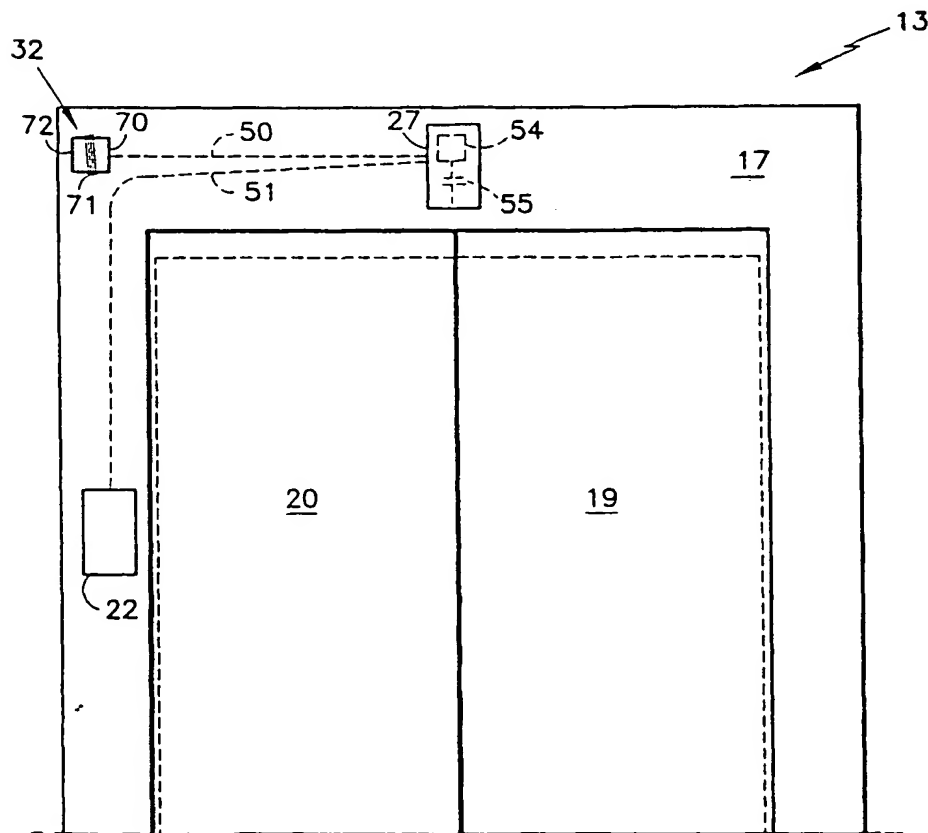

2/2

FIG.3


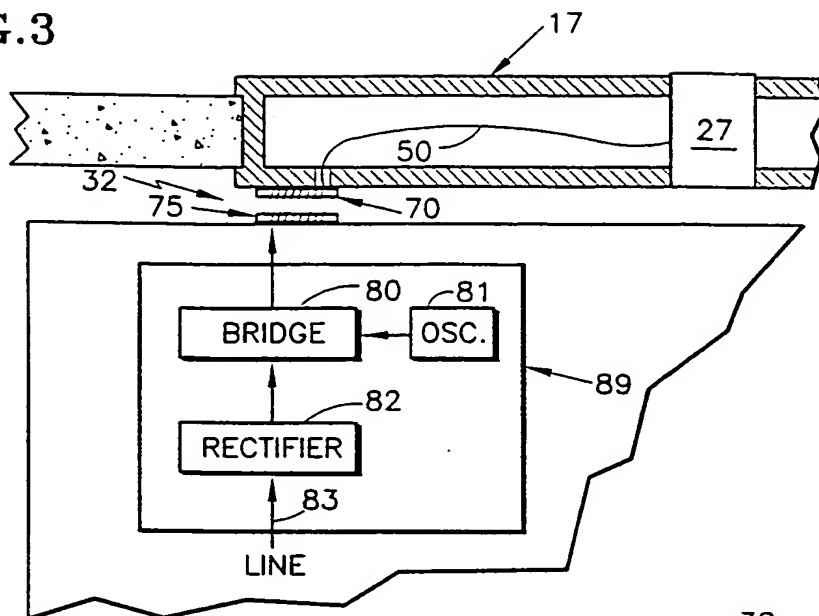


FIG.4

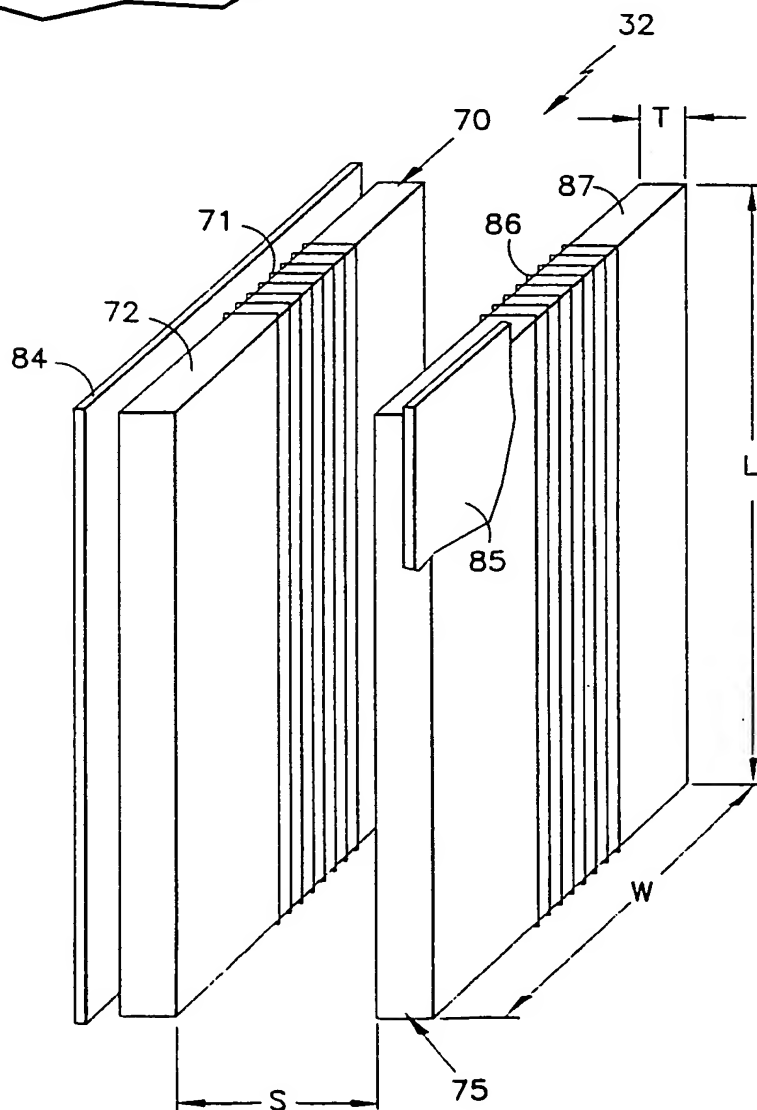

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US03/18597

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>		
IPC(7) : B66B 1/06 US CL : 187/391, 290, 413, 277, 289; 320/108, 109, 112, 113 According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b>		
Minimum documentation searched (classification system followed by classification symbols) U.S. : 187/391,290,413		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2002/0112924 A1 (MORI et al) 22 August 2002 (22.08.2002), see entire document.	1-3
Y	US 6,331,744 B1 (CHEN et al) 18 December 2001 (18.12.2001), see entire document.	1-3
A	US 6,412,604 B1 (SCHUSTER) 02 July 2002 (02.07.2002), see entire document.	1-3
A	US 2001/0012208 A1 (BOYS) 09 August 2001 (09.08.2001), see figures 2,7.	1-3
A	US 6,301,128 B1 (JANG et al) 09 October 2001 (09.10.2001), see figures 3,5,6.	1-3
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
<b>* Special categories of cited documents:</b>		
"A"	document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E"	earlier application or patent published on or after the international filing date	"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claims) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means	"Z" document member of the same patent family
"P"	document published prior to the international filing date but later than the priority date claimed	
Date of the actual completion of the international search 18 August 2003 (18.08.2003)		Date of mailing of the international search report 25 MAR 2004
Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US Commissioner for Patents P.O. Box 1450 Alexandria, Virginia 22313-1450 Facsimile No. (703)305-3230		Authorized officer Jonathan Salata <i>Diana Luna</i> Telephone No. 703-308-0956